

AR-40-4D




STANDARD FEATURES


- Insulation** Polyurethane foam injected under 500 tons of pressure to ensure uniformity and high structural strength.
- Finish** Tough, hygienic construction, exterior bodies are of 304 grade stainless steel no.4 finish. Door frame and mullion are of 430 grade stainless steel for magnetic gaskets. Interior is 304 stainless steel 2B finish. Zinalume steel top, base and back.
- Door** Choices of full door or half door stainless steel or full door or half door double pane 3 mm. heat reflective insulated glass. Self closing door with easily replaceable magnetic gasket. Mullion heater standard for freezer units but option for refrigerator.
- Refrigerator system** Self-contained, easily removable, top mounted condensing unit. Fitted with condensate evaporator, no drain connection required.
- Controller** Multi-function microprocessor controlled with digital thermometer display.
- Refrigerant** • R404a for freezer • R134a for chiller
- Shelves / GN pan** Complete with 4 pcs. PVC coated wire shelves per full door. Stainless steel angle slide, suit GN 2/1 pan size.
- Other features** Coved stainless steel floor pan. Interior light. Heavy duty, adjustable, stainless steel bullet feet. Left hinge or right hinge selectable.
- Optional extra**
 - Stainless steel wire shelves.
 - Remote condensing unit.
 - Stainless steel base and back.
 - Locking plate or Cylindrical locks.
 - Mullion heater for refrigerator.
 - Swivel castors.
 - Double pane heat reflective glass door.

➔ *All time favourite model which becomes industry standard.*


TECHNICAL DATA	Refrigerated Models			Freezer Models		
Model number	AR-18	AR-40	AR-60	AF-18	AF-40	AF-60
Dimension L x D x H (mm.)	680 x 810 x 2000	1320 x 810 x 2000	1975 x 810 x 2000	680 x 810 x 2000	1320 x 810 x 2000	1975 x 810 x 2000
Capacity Cu. Ft./ Litres	18/510	43/1218	66/1869	18/510	43/1218	66/1869
Temperature range	2°C to 5°C			-18°C to -20°C		
Cooling capacity (Btu.)	1280	2529	4050	1628	3067	5568
Compressor	1/3	1/2	3/4	3/4	1	2
Shelves	4	8	12	4	8	12
Mullion heater (full/half doors)	50	50 x 2	40 x 3	62	76 x 2	80 x 3
Defrosting system	Circulated air			Electric		
Power supply	220-240 V / 50 Hz / 1 Ph (60 Hz models are available.)					

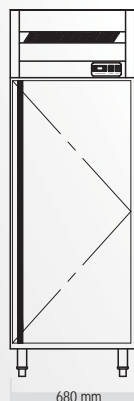

FRONT VIEW
AR18-1D
AF18-1D

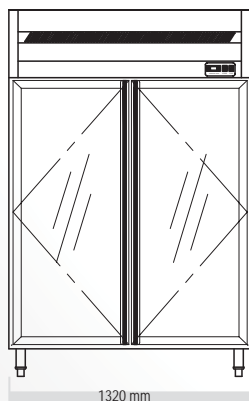

FRONT VIEW
AR40-2D
AF40-2D

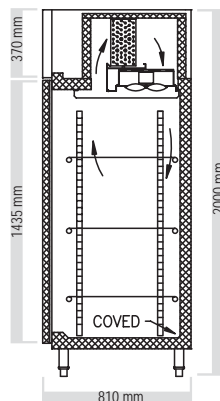

CROSS SECTION



Detail : 1



Detail : 2



Scan me

