



BSR-2


→ Popular base mounted mini-mart showcase

» STANDARD FEATURES


- Insulation** Polyurethane foam injected under 500 tons of pressure to ensure uniformity and high structural strength, 60 mm. thick.
- Finish** Interior and exterior white Colorbond steel (Food grade), Zincalume top, base and back, Aluminum door frame.
- Glass door** Double pane glass door, with 3 mm heat reflective coated glass, self closing door with easily replaceable magnetic door gasket. Freezer are fitted with heated glass anti-sweat mullion heater.
- Refrigerator system** Bottom mounted condensing unit or optional remote system. Fitted with condensate evaporator, no drain connection required.
- Controller** Multi-function microprocessor controlled with digital thermometer display.
- Refrigerant**
 - Refrigerator (R) R134a
 - Freezer (F) R404a
 - CFC free
- Shelf** Complete with 5 pcs. PVC coated wire shelves per full door.
- Leg / caster** Adjustable, stainless steel bullet feet.
- Other features** Coved stainless steel floor pan.
- Optional extra**
 - Remote condensing unit.
 - Swivel caster wheel.
 - Choice of door opening direction.
 - Mullion heater for refrigerator.
 - Additional shelves.

» TECHNICAL DATA

Model number	BSR-1	BSR-2	BSR-3
Dimension - LxDxH (mm)	680 x 810 x 2000	1320 x 810 x 2000	1975 x 810 x 2000
Temperature range	2 °C to 5 °C		
Cabinet capacity Cu. Ft / Litres.	20/566	40/1151	63/1783
Cooling capacity (Btu.)	1703	3125	4528
Compressor (Hp.)	1/3	1/2	1
Shelves	5	10	15
Interior light (w)	36 x 2		
Defrosting system	Circulated air		

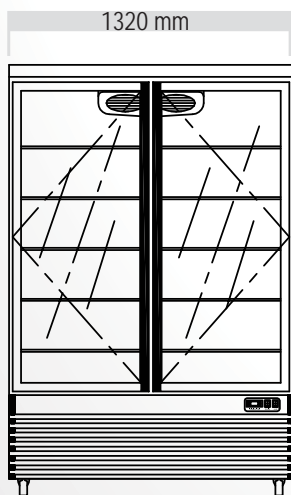

BS-2G
FRONT VIEW

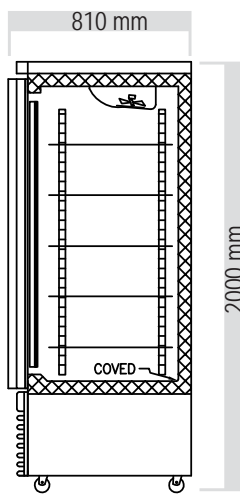

CROSS SECTION



Scan me

